


# Model HI 1756-FC Weigh Feeder Control Module

## Applications

### PROCESS WEIGHING

- Feeder Rate Control
- Gravimetric Feeding
- Continuous and Batch Rate Control

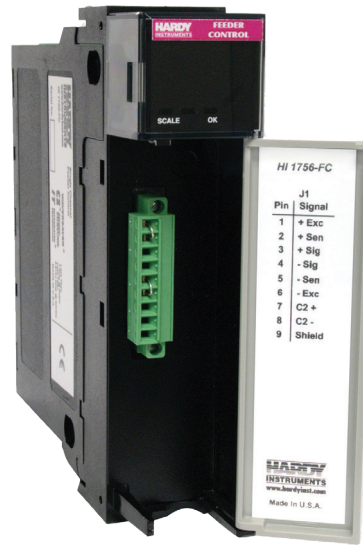

## Features

### THE HARDY PROCESS TOOLBOX

The Hardy Process Toolbox is a set of productivity tools that support process weighing functions. Each tool saves time, increases accuracy, improves efficiency or reduces risk in process weighing applications.



- **C2® and eCAL Electronic Calibration**  
 Electronic calibration without test weights

- **WAVERSAVER®**  
 Ignores vibration on and around scales providing faster settling time

- **INTEGRATED TECHNICIAN®**  
 Weighing system monitoring and troubleshooting



### Benefits

- Direct Backplane to the Allen-Bradley® ControlLogix® PLC
- Reduce installation time and system costs with no need for external wiring
- Automatic Closed Loop Control
- Continuously adjusts feeder to deliver desired feed rate
- Add-On-Profile
- Automatic Refill starts and stops refilling without interrupting material feed

Used in new applications, to retrofit volumetric feeders or replace outdated controllers in gravimetric systems, the single scale HI 1756-FC weigh feeder control module mounts directly into your Allen-Bradley® ControlLogix® chassis. By using the PLC rack I/O, it can control many feeding devices, such as auger, vibratory and belt-based feeders, and your proprietary designs.

### EASY TO INTEGRATE INTO PLC

Hardy's ControlLogix Add-On Profile (AOP) makes it quick and easy to configure for your application through PLC software on a PC. As a backplane ControlLogix module, the HI 1756-FC has no need for external wiring and supports removal and insertion under power.

### MULTIPLE FEEDER CONTROL

The HI 1756-FC is a powerful building block when it comes to multiple feeder systems. It can be a slave to other process inputs through the PLC processor. Automatic closed loop control continuously adjusts the feeder to deliver the desired feed rate. Automatic refill starts and stops refilling without interrupting the feeding of material.

### WORRY-FREE OPERATION

The HI 1756-FC feeder control module will watch your process and notify you of problems. Prompts on your system's HMI display and PLC alarm relay outputs occur with tolerance errors and other failures. By entering specific control parameters, you decide at which levels to alarm or shut down the application. Two indicator lights show system status at all times.

### AUTOMATIC WEIGHT AND RATE CALIBRATION

A five-point auto rate calibration automatically allows the module to calibrate itself to the characteristics of the feeder and the material being fed. This allows for a higher feed accuracy over a broader range of feed rates.

### C2® ELECTRONIC CALIBRATION

C2 enables electronic calibration of the weigh system without test weights. This saves you system start-up costs and aggravation. Of course, even if C2 certified load sensors are not used, the system can still be calibrated the slow, traditional way using certified test weights.

### WAVERSAVER®

WAVERSAVER ignores vibration and mechanical noise in feeders and the plant environment by permitting the weigh module to "see" through the unwanted vibration signals - as low as 0.25Hz or as high as 7.5 Hz - while yielding a stable weight reading.


### INTEGRATED TECHNICIAN®

INTEGRATED TECHNICIAN, used in conjunction with a Hardy IT junction box, provides built-in system diagnostics that enable you to troubleshoot and diagnose your weighing system. You can read individual load sensor voltages and weights, make comparisons, and isolate individual system components for quick and easy troubleshooting.

## COMPONENTS TO COMPLETE YOUR HARDY SYSTEM

### Hardy Bench Scales, Floor Scales and Load Points

Hardy carries a wide variety of strain gauge load points and scale bases to meet your application requirements.

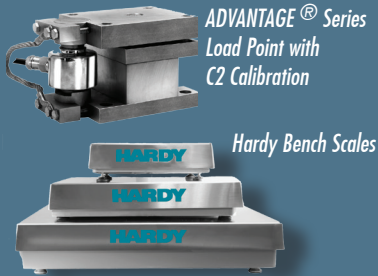

### Weighing Instruments Dedicated to Your Applications

Controllers, Weigh Modules, Weight Processors

Allen-Bradley® Compatible Plug-in Weigh Scale Modules



HI 3000 Series HI 4050 Controllers and HI 6000 Series



## SPECIFICATIONS

### Power

- Provided from the backplane of the rack
- +5Vdc
- +24Vdc

### Backplane Current

- < 1 Amp @ 5Vdc 5W
- < 0.0125 Amp 0.3W @ 24Vdc with four 350 ohm L.C.

### Totalizer

- Keeps track of the amount of ingredient dispensed

### Time Units

- Seconds, minutes and hours

### Units of Measure

- lb, oz, ton, kg, g, mt

### Mode

- Batch, continuous

### Inputs

- Signal: -2.5mV through +17.56mVdc
- Sense: + 5Vdc
- C2, Electronic Calibration

### Outputs

- Excitation 5Vdc to +8.75Vdc

### Common Mode Rejection

- 100dB at or below 60Hz (minimum)

### Resolution

- Internal, 1:8,388,608

### Conversion Rate

- 110 updates per second

### Averages

- 1-255 user selectable in single increments

### Vibration Frequency Rejection

- WAVERSAVER
- 0.25 Hz and above in 5 selectable steps, and OFF

### I/O Chassis Location

- Any single I/O chassis slot

### Environmental Conditions

- Operating Temperature: 0 to 60°C (32 to 140°F)
- Storage Temperature: -40 to 85°C (-40 to 185°F)

### Relative Humidity

- 5 to 95% (non-condensing)

### Weighing Modes

- Net, Gross

### Calibration Techniques

- Electronic (C2)
- Traditional (test weights)

### Automatic Rate Calibration

- Five-point

### Weight

- 1.1 lb (0.5kg)

### Indicators

- "OK", Module Status, LED
- "Scale 1", Functional Data, LED

### Approvals

- UL and CE

### Warranty

- Two-year warranty against defects in workmanship

## OPTIONS

### • Remote Termination Assembly (-RTA)

The weigh scale module optional Remote Termination Assembly provides connection points between the cable assembly to the module and individual wires from the junction box, or load sensors, of up to two scales. The RTA is designed for standard DIN mounting rails or standoffs. With an HI 1756-RTA configuration, the weigh scale modules can be replaced without disturbing the wiring.

### • Cable (-C6)

Hardy provides an optional 6-foot cable assembly from the weigh scale module to the remote termination assembly.

### • Options Ordering

Options can be ordered at the same time the module is ordered by adding the dash designators to the end of the module number.

For example:

HI 1756-FC-RTA-C6	Single-scale weigh feeder control module with remote termination assembly and cable
HI 1756-FC	Single-scale weigh feeder control module alone
HI 1756-XX-RTA	Remote termination panel alone
HI 1756-XX-C6	Single-scale 6-foot (1.8m) cable alone

To learn more about the HI 1756-FC visit our web site for:

- Full product specifications
- Ordering information
- Application notes
- Technical description
- User's Guide

[www.hardysolutions.com](http://www.hardysolutions.com)

or call us: 800-821-5831  
+1-858-278-2900

**HARDY**  
**PROCESS SOLUTIONS**  
Measurement • Automation • Productivity

### Hardy Process Solutions

9440 Carroll Park Dr.  
San Diego, CA 92121  
tel. +1-858-278-2900  
tel. 800-821-5831  
fax +1-858-278-6700  
[www.hardysolutions.com](http://www.hardysolutions.com)  
hardyinfo@hardysolutions.com

**ISO 9001:2008**  
**CERTIFIED**

Since 1993

All information within is subject to change without notice. Visit our website for latest specifications. WAVERSAVER, C2, IT, ADVANTAGE and ANY-WEIGH are registered trademarks of Hardy Process Solutions, Inc.. Allen-Bradley, ControlLogix and Encompass are trademarks of Rockwell Automation, Inc. All other trademarks or registered trademarks are the property of their respective owners.

HI 1756-FC 0115  
0400-0011E